

DOCUMENT No:		200-000-203				
REVISION HISTORY						
REV	DESCRIPTION		REF. No.	DATE	DRWN BY:	RWD BY:
0	Initial Release	1	781D	2018-09-19	1	

STOCK PROJECT NAME: STOCK

DX-2100-F, DX-2100

DRAWING TITLE:
FULL SIZED APOLLO CSA USE ZONE (SAFETY AREA) DRAWING


REV:	SHEET:		SHEET SIZE:	SCALE:
0	1 OF 1		PA3	NTS
DESIGNED BY WILL	Y: IAM MCNAIR	DAT		018-04-17
DRAWN BY: WILL	IAM MCNAIR	DAT		018-09-19
CHECKED BY		DAT	E:	
CHECKED BY		DAT	E:	
REVIEWED B	Y:	DAT	E:	



Toll free: 800-790-0034

Email: info@dynamoplaygrounds.com Fax: 613-446-0034

URL: www.dynamoplaygrounds.com

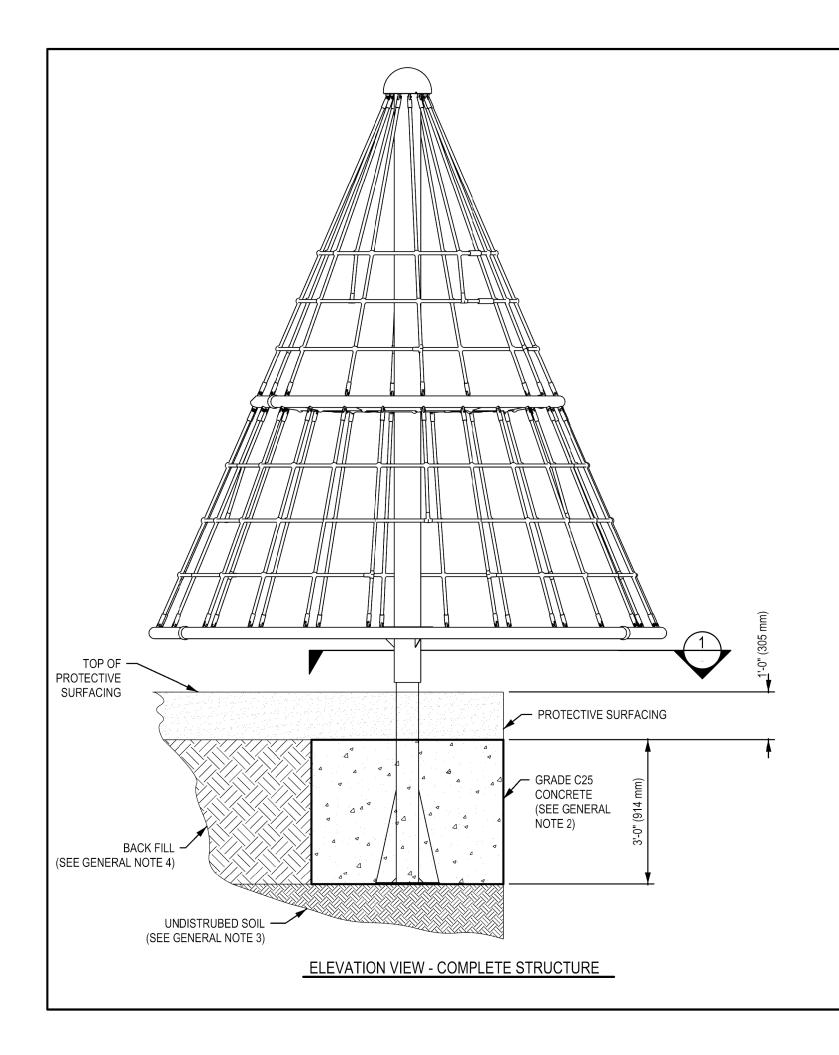

## **GENERAL NOTES:**

- 1. THE FOUNDATION IN THE DRAWING TO BE USED AS A MININUM GUIDELINE.
- 2. THE CONCRETE SHALL BE GRADE C25 (CHARACTERISTIC STRENGTH OF 3500 PSI AT 28 DAYS) MINIMUM.
- 3. THE FOUNDATION SHALL BE PLACED ON FIRM, UNDISTURBED SOIL SURFACE. WHEREVER EXCAVATION OCCURS BELOW THE DESIGNED FOUNDATION LEVEL, WELL COMPACTED BACK FILL OR LEAN CONCRETE SHALL BE USED FOR LEVELING.
- 4. BACKFILLING FOR FOUNDATION SHALL BE PLACED EVENLY IN 6" (150mm) LAYERS. LAYERS SHALL BE WELL COMPACTED.
- 5. THE FOUNDATION DESIGN IS SUITABLE FOR SOIL WITH A BEARING CAPACITY OF 1600 PSF (80 KPA) AND ABOVE.
- 6. THE FOUNDATION DESIGN IS SUITABLE FOR SOIL WITH FROST LINE OF 4' (1200 MM) OR LESS.

DOCUMENT No:		200-000-200				
	REVISION HISTORY					
REV	DESCRIPTION		REF. No.	DATE	DRWN BY:	RWD BY:
0	Initial Release		1781D	-	-	

ENGINEERING SEAL:

CLIENT:

STOCK

PROJECT NAME: PRODUCT NO:

DX-2100-F, DX-2100

STOCK

DRAWING TITLE:

## FULL SIZED APOLLO FOOTING DRAWING


REV:	SHEET:		SHEET SIZE:	SCALE:		
0	1 OF 1		PA3	NTS		
DESIGNED BY: JASON ZHAI			DATE: 2017-12-19			
DRAWN BY: WILLIAM MCNAIR			DATE: 2018-04-17			
CHECKED BY:		DATE:				
CHECKED BY:			DATE:			
REVIEWED BY:			DATE:			



Toll free: 800-790-0034 Email: info@dynamoplaygrounds.com

Fax: 613-446-0034

URL: www.dynamoplaygrounds.com

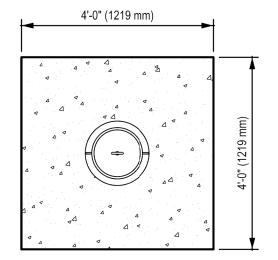

1 PLAN VIEW - POST ONLY